


PCIE-G41A

Full-size PICMG 1.3 CPU card supports LGA775 Intel® Core™2 Quad processor with VGA, Dual PCIe GbE, SATA 3Gb/s, COM and USB 2.0, RoHS

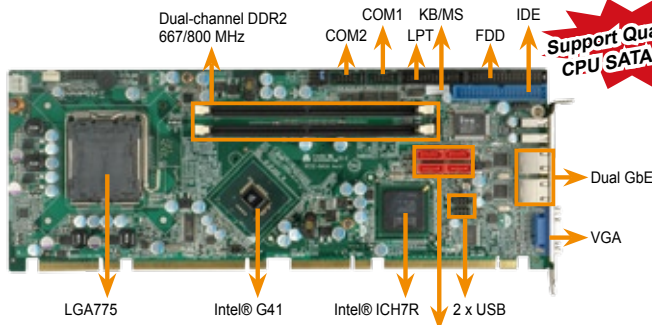

Support Quad Core CPU SATA RAID

FSB 1333 Dual DDR2 800

Intel® Matrix Storage Manager

USB

Gigabit Ethernet

SERIAL ATA

One Key Recovery

Features

1. PICMG 1.3 form factor
2. LGA775 Intel® Core™2 Extreme/Quad/Duo and Celeron processor supports up to 1333MHz FSB
3. Dual-channel DDR2 800/667 MHz supports up to 8GB
4. High performance PCI-Express Gigabit Ethernet controller
5. Four SATA 3Gb/s ports with Intel® Matrix Storage Manager support
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA 775 Intel® Core™ 2 Extreme/Quad/Duo, Celeron with a 1333/1066/800MHz FSB support
- ◆ System Chipset: Intel® G41 + ICH7R
- ◆ BIOS: AMI Flash BIOS
- ◆ System Memory: Two 240-pin 4GB (max.) 800/667 MHz dual-channel DDR2 DIMM (system max. 8GB)
- ◆ Ethernet: Dual PCIe Realtek RTL8111CP GbE controllers
- ◆ I/O Interface: 1 x FDD, 2 x RS-232, 1 x IDE, 1 x LPT, 4 x SATA 3Gb/s with Intel® RAID 0, 1, 5 and 10, 1 x KB/MS by 6-pin header, 8 x USB 2.0 (2 on bracket, 2 on board by pin-header, 4 to backplane via Golden Finger)
- ◆ Digital I/O: 8-bit digital I/O, 4 input/ 4 output
- ◆ Infrared Interface: 1 x infrared by 5-pin header
- ◆ Super I/O: ITE IT8718F
- ◆ Graphic: Intel® Graphics Media Accelerator X4500 (Intel® GMA X4500)
- ◆ Display Interface: Analog CRT supports up to 2048 x 1536 resolution
- ◆ Audio: 5.1 channel audio kit with Realtek ALC655 AC'97 codec, 7.1 channel HD audio kit with Realtek ALC883 codec supports dual audio streams
- ◆ Watchdog Timer: Software programmable supports 1 ~255 sec. System reset
- ◆ Power Supply: ATX Power
- ◆ Power consumption: 3.3V@0.3A, 5V@6.71A, 12V@0.27A, Vcore_12V@1.91A (Intel® Core™2 Duo E8500 3.16GHz 1333MHz FSB CPU two 2GB 800MHz DDR2)
- ◆ Temperature operation: 0°C~ 60°C (32°F~ 140°F)
- ◆ Humidity operation: 5% ~95 non-condensing
- ◆ Dimensions: 338 mm x 126 mm
- ◆ Weight: GW: 1.1kg

Packing List


1 x PCIE-G41A single board computer	
4 x SATA cable (P/N: 32000-062800-RS)	1 x Mini jumper pack
1 x Dual RS-232 cable (P/N: 19800-000051-RS)	1 x USB cable (P/N: CB-USB02-RS)
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
PCIE-G41A-R10	Full-size PICMG 1.3 CPU card supports LGA775 Intel® Core™ 2 Quad processor with VGA, Dual PCIe GbE, SATA 3Gb/s, COM and USB 2.0, RoHS
AC-KIT-883HD-R10	7.1 channel HD Audio Kit with Realtek ALC883 support dual audio streams
AC-KIT08R-R10	5.1 channel AC'97 audio kit with Realtek ALC655
19800-000075-RS	PS/2 KB/MS cable with bracket
CF-520-RS-R11	CPU cooler
CF-775A-RS	CPU cooler
32102-000100-100-RS	SATA power cable
32102-000100-200-RS	SATA power cable
32200-000017-RS	FDD cable
19800-000400-100-RS	LPT cable with Bracket
32200-000052-RS	ATA66 IDE flat cable

PCIE-Q350-R11

Full-size PICMG 1.3 CPU card supports 45 nm LGA 775 Intel® Core™2 Duo and Core™2 Quad processors with an 800 MHz, 1066 MHz or 1333 MHz FSB and comes with an Intel® Q35 GMCH, ICH9DO I/O controller hub, dual Intel® GbE, SATA II with RAID and USB 2.0

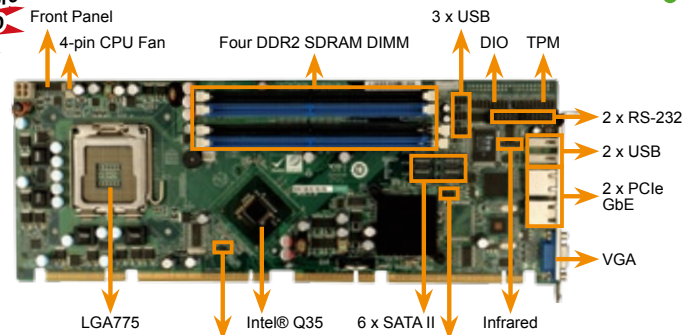

FSB 1333 Dual DDR2 800

TPM 1.2 Support

SERIAL ATA

USB

Gigabit Ethernet

Intel® Matrix Storage Manager

One Key Recovery

Features

1. PICMG1.3 and RoHS compliant
2. Intel® Q35 & ICH9-DO Platform
3. Supports 45nm LGA775 Intel® Core™2 Duo and Core™2 Quad processors
4. Six SATAII Ports with Intel Matrix storage technology supported
5. Dual Intel® PCIe GbE
6. TPM1.2 IT security solution supported
7. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA 775 Intel® Core™2 Quad, Core™2 Duo, Celeron® processors with a, 800 MHz, 1066MHz, and 1333MHz FSB
- ◆ System Chipset: Intel® Q35 + ICH9-DO
- ◆ BIOS: AMI BIOS Label with 8Mb SPI EEPROM
- ◆ System Memory: Four 240-pin 2 GB (max.) 800 MHz, 667 MHz dual-channel DDR2 SDRAM DIMM supported (system max. 8GB)
- ◆ Ethernet: Dual GbE, LAN1: Intel® 82566DM GbE controller with iAMT support, LAN2: Intel® 82573L GbE controller
- ◆ I/O Interface: 2 x RS-232, 6 x SATA II (RAID 0, 1, 5, 10), 1 x Keyboard and mouse connector, 12 x USB 2.0 (2 on bracket, six on SBC, four on backplane by pin header)
- ◆ Super IO: ITE 8718F
- ◆ Digital I/O: 16-bit Digital I/O, 8-bit input / 8-bit output
- ◆ Infrared interface: 1 x Infrared by pin header
- ◆ Audio: 10-pin on-board header connects to the IEI AC-KIT883HD 7.1 channel HD Audio kit
- ◆ Graphics: Analog VGA output
- ◆ TPM1.2: 1 x 20-pin on-board header for TPM (Trusted Platform Module)
- ◆ Watchdog Timer: Software Programmable supports 1~255sec. system reset
- ◆ Power Supply: ATX
- ◆ Power Consumption: 3.3V@3.0A, 5V@5.1A, 5Vsb@0.28A, 12@4.23A (Intel® Core™ 2 Duo E6700 2.66 GHz at FSB 1066, 8 GB DDR2 667 MHz, 3DMark 2001)
- ◆ Temperature Operation: 0°C ~ 60°C (32°F ~ 140°F)
- ◆ Humidity Operation: 5% ~95% non-condensing
- ◆ Dimensions: 338 mm x 126 mm
- ◆ Weight: GW:1.1 kg

Packing List

1 x PCIE-Q350 single board computer	
3 x SATA power cable (P/N: 32102-000100-100/200-RS)	
6 x SATA cable (P/N: 32000-062800-RS)	1 x Mini jumper pack
1 x Dual RS-232 cable (P/N:19800-000051-RS)	1 x USB cable (P/N: CB-USB02-RS)
1 x Utility CD	1 x QIG

Ordering Information

Part No.	Description
PCIE-Q350-R11	PICMG1.3 CPU card supports Intel® 45nm LGA 775 Core™2 Duo/Quad CPU at FSB800/1066/1333 MHz, Intel® Q35 & ICH9DO platform, Dual Intel® GbE, SATA II with RAID, USB
AC-KIT883HD-R10	7.1 channel HD audio kit with Realtek ALC883 supports dual audio streams
CF-520-RS-R11	High performance CPU cooler (115mm x 115mm x 67mm, 115W)
CF-775A-RS	High performance CPU cooler (92 mm x 92 mm x 73 mm, 130W)
TPM-IN01-R10	Infineon 20-pin trusted platform module with S/W management tool
TPM-WI01-R10	Winbond 20-pin trusted platform module with S/W management tool
SDVO-100VGA-R10	PCIe x16 VGA output SDVO card supports dual display (IEI CPU board only)
SDVO-100DVI-R10	PCIe x16 DVI output SDVO card supports dual display (IEI CPU board only)
19800-000075-RS	KB/MS cable with bracket

1 Industrial Computing Solutions

2 Embedded Computing Solutions

3 Industrial Data Collector and Controller

4 Video Capture Solutions

5 I/O Communication Solutions

6 Panel Solutions

7 ORing Network Communication

8 Power Supply Peripherals