


# SPCIE-5100P

Full-size PICMG1.3 CPU card supports socket P Intel® 45nm Core™2 Duo processors and comes with VGA, Dual PCIe GbE, SATA II with RAID function, USB and Audio

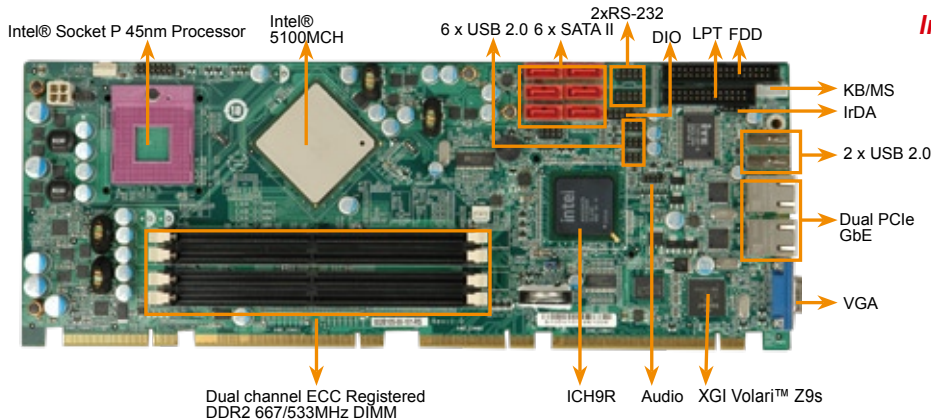

## Intel® Core™2 Duo Processor Features

**Intel® Core™2 Duo family processor**  
New micro-architecture features for greater performance and new capabilities

**Intel's First 45nm micro processors**  
High-k + metal gate transistors - breakthrough technology that significantly reduces leakage power

### Penryn processor

**Up to 6MB L2 Cache & 1066 FSB**  
Larger L2 & higher FSB deliver higher performance

**Improved Performance**  
Performance and energy efficiency lead established by Intel® Core™2 family processors



## Specifications

- ◆ CPU  
Socket P Intel® Core™2 Duo processors with a 1066 MHz FSB
- ◆ System Chipset  
Intel® 5100 MCH + ICH9R chipsets
- ◆ BIOS  
AMI Flash BIOS
- ◆ System Memory  
Four 240-pin 667/533 MHz dual-channel DDR2 ECC Registered DIMM supported (system max. 8GB)
- ◆ Ethernet  
Dual PCIe Ethernet support by Intel® 82574L GbE
- ◆ I/O Interface  
2 x RS-232  
12 x USB 2.0  
(Two on the bracket, six on SBC and four on backplane by pin header)  
6 x SATA II with RAID 0,1, 5 and 10  
1 x LPT  
1 x FDD  
1 x 6-pin header for KB/MS
- ◆ Digital I/O  
8 bit digital I/O, 4-bit input/ 4-bit output
- ◆ Infrared Interface  
1 x Infrared by pin header
- ◆ Super I/O  
ITE IT8718F
- ◆ Display Interface  
VGA support by XGI Volari Z9s Graphic controller  
Support VGA resolution support up to 1600x1200
- ◆ Audio  
Support by 7.1 channel HD Audio Kit
- ◆ Watchdog Timer  
Software programmable supports 1 ~255 sec. System reset
- ◆ Power Supply  
ATX Power
- ◆ Power consumption  
3.3V@0.62A, 5V@4.69A, 12V@2.32A (Intel® Core™2 Duo P8600 2.4GHz 1066MHz FSB CPU with 8GB DDR2 667MHz)
- ◆ Temperature  
Operation: 0°C ~ 60°C ( 32°F ~ 140°F)
- ◆ Humidity  
Operation: 5% ~95% non-condensing
- ◆ Dimension  
338 mm x 126 mm
- ◆ Weight  
GW: 1200 g / NW: 420 g

## Features

1. PICMG1.3 full size server grade solution
2. Intel® 45nm socket P Core™ 2 Duo processor with a 1066 MHz FSB
3. Intel® 5100 server-grade platform supports six PCIe x4 lanes for flexible PCIe application
4. ULV XGI volari Z9s graphic controller support VGA output
5. Four 240-pin DDR2 ECC Registered DIMM supported
6. Six SATA II with RAID support RAID 0, 1, 5 and 10
7. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Packing List

1 x SPCIE-5100P Single Board Computer
1 x Mini jumper pack
6 x SATA cable (P/N: 32000-062800-RS)
1 x Dual RS-232 cable (P/N: 19800-000051-RS)
1 x USB Cable (P/N: CB-USB02-RS)
1 x Utility CD
1 x QIG

## Ordering Information

Part No.	Description
SPCIE-5100P-R10	Full-size PICMG1.3 CPU card supports socket P Intel® 45nm Core™2 Duo processors and comes with VGA, Dual PCIe GbE, SATA II with RAID function, USB and Audio
CF-479B-RS	CPU cooler (50mm x 50mm x 26mm, 50W)
AC-KIT883HD-R10	7.1 channel HD audio Kit with Realtek ALC883 support dual audio streams
32200-000017-RS	FDD cable
19800-000400-100-RS	LPT cable
19800-000075-RS	KB/MS cable with bracket
32102-000100-100-RS	SATA power cable
32102-000100-200-RS	SATA power cable

1  
Industrial  
Computing  
Solutions

2  
Embedded  
Computing  
Solutions

3  
Industrial Data  
Collector  
and Controller

4  
Video  
Capture  
Solutions

5  
I/O  
Communication  
Solutions

6  
Panel  
Solutions

7  
ORing  
Network  
Communication

8  
Power Supply/  
Peripherals