


# RACK-325A

## 5U 20-Slot Chassis



RACK-325A

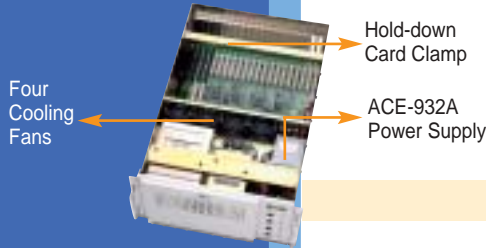

Four Cooling Fans

Hold-down Card Clamp

ACE-932A Power Supply

### SPECIFICATIONS

- 5U height 19" Rack mounting chassis
- Front panel with lockable door to protect the running system
- Bracket area on front view for easily cables accessing
- Drive Bays: 4 x 3.5" FDD and 4 x 5.25" Drive
- Four 8cm ball bearing cooling fans with filter
- Designed with an anti-vibration card clamp that keep the system stable
- Supports backplane: BP-20S, BP-20SD, BP-20ST, BP-20SQ, PCI-17SQ, PCI-18SD, PX-19S, PCI-18SQ, PXAGP-19S, PXAGP-19S2
- Supports power supply: PS/2 size AT/ATX PSU
- Optional rack-mount slide: 30"
- Vibration: 5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- Color: White (PANTONE 413C)
- Dimensions: 431(W) x 220(H) x 651.6(D)mm; (17" x 6.9" x 25.7")
- Net/GW (kg): 18/22

### ORDERING INFORMATION

RACK-325AW/ACE-932A : 5U 20-slot rackmount chassis with ACE-932A power supply

# RACK-320A 4U 20-Slot Chassis



RACK-320A



Top View

### SPECIFICATIONS

- 4U height 19" Rack mounting chassis
- Two set of reset switches & HDD indicators for dual system applications
- Plastic front panels
- AT type KBD connector on front panel with cap protection
- Drive Bays: 2 x 3.5" FDD and 2 x 3.5" HDD
- One 8cm and one 12cm cooling fans with filter
- Designed with anti-vibration card clamp to keep system stable
- Supports backplane : BP-20S, BP-20SD, BP-20ST, BP-20SQ, PCI-17SQ, PCI-18SD, PCI-19S, PX-19S, PXAGP-19S, PXAGP-19S2
- Supports power supply: PS/2 size AT/ATX PSU
- Optional rack-mount slide : 24" or 30"
- Vibration: 5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- Color: White (PANTONE 413C)
- Dimensions: 431(W) x 176(H) x 573(D)mm; (17" x 6.9" x 22.6")
- Net/GW (kg): 12/17

### ORDERING INFORMATION

RACK-320AW/ACE-935AL : 4U 20-slot rackmount chassis with ACE-935AL power supply

# RACK-300H 4U 12-Slot Half Size Chassis



RACK-300H



Top View

### SPECIFICATIONS

- 4U height 19" Rack mounting chassis
- Front panel with lockable door to protect the running system
- AT type KBD connector on front panel
- Drive Bays : 1 x 3.5" FDD and 1 x 5.25" Drive
- One 12cm cooling fan with removable filter
- Supports backplane: BP-12S, IP-12S, PCIAGP-12S
- Supports power supply: PS/2 size AT/ATX PSU
- Vibration: 5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak
- Shock: 10G acceleration peak to peak (11ms)
- Color: White (PANTONE 413C)
- Dimensions: 431(W) x 177(H) x 273(D)mm; (17" x 7" x 10.7")
- Net/GW (kg): 10/12

### ORDERING INFORMATION

RACK-300HW/ACE-920A : 4U 12-slot half-size rackmount chassis with ACE-920A power supply